


# LED PAR 64 186x RGBW


## User Manual



Please read this manual carefully before operating the LED light

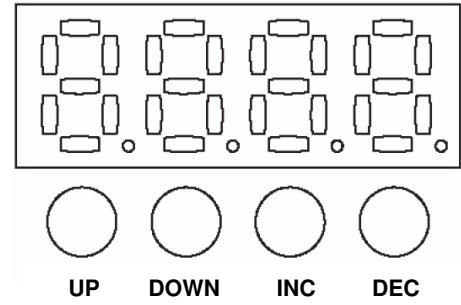

## ● LED DISPLAY FUNCTIONS

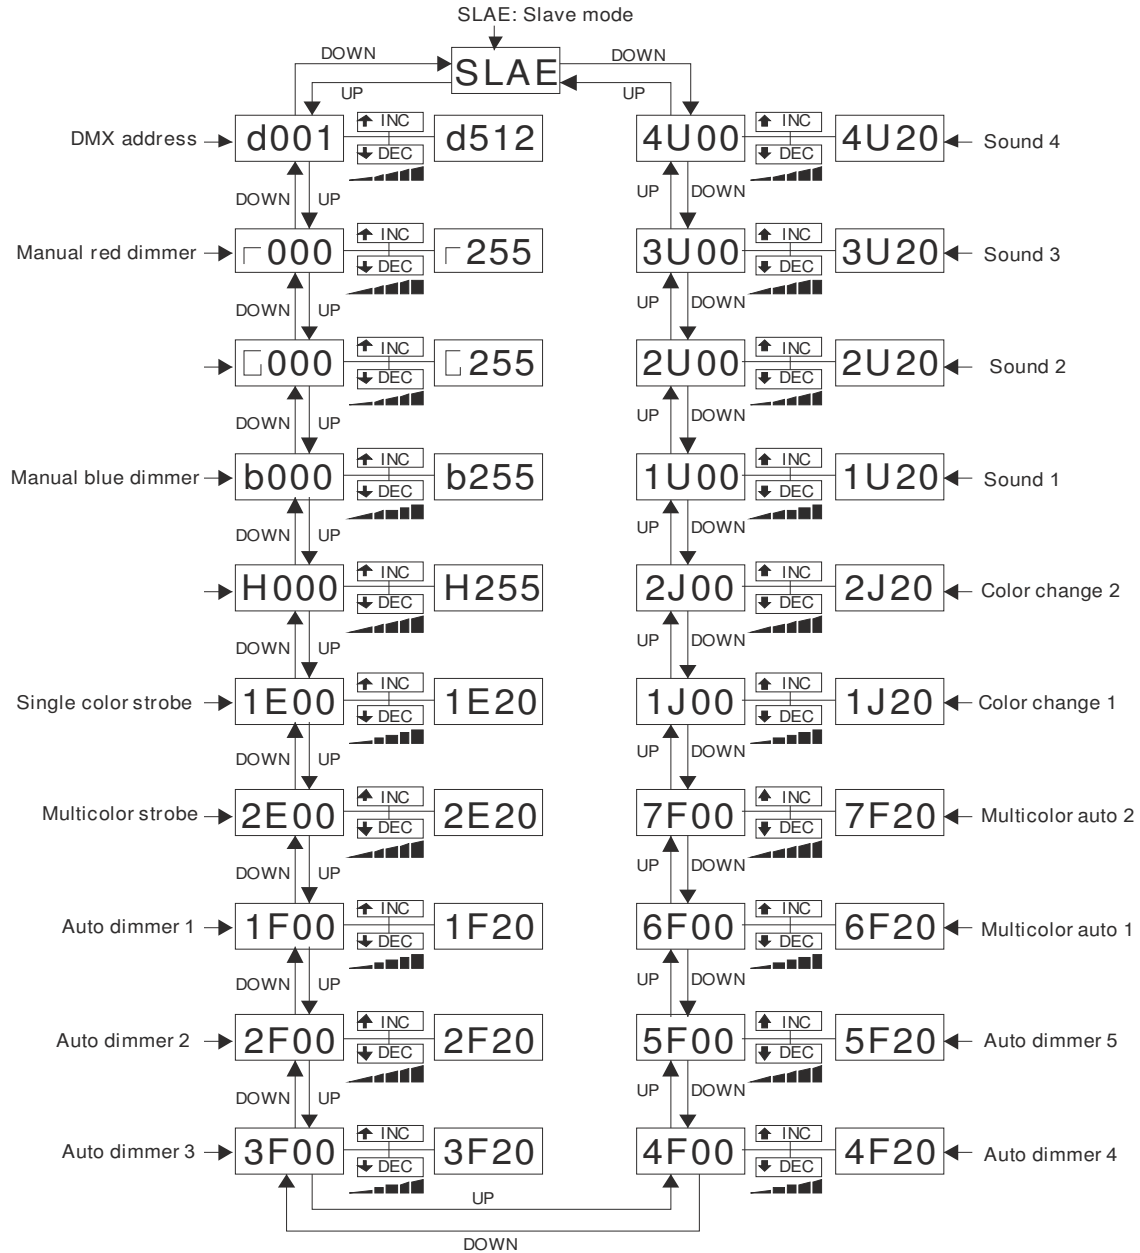

## ● DMX VALUES AND FUNCTIONS

Channel	Values	Functions
1	0-255	Manual red dimmer 0-100%
2	0-255	Manual green dimmer 0-100%
3	0-255	Manual blue dimmer 0-100%
4	0-255	Manual white dimmer 0-100%
5	0-255	0-14 no function, 15-29 single color strobe(channel 1/2/3/4 control the color, channel 8 control the speed), 30-44 multicolor strobe(channel 1/2/3/4 on top value, channel 8 control the speed), 45-255 choose the color
6	0-255	1-209 single color dimmer, 210-223 auto dimmer 1, 224-255 auto dimmer 2(channel 1-5 will not work in this mode. Channel 8 control the speed)
7	0-255	1-19 auto dimmer 3, 20-39 auto dimmer 4, 40-59 auto dimmer 5. 60-79 auto dimmer 6, 80-99 color change 1, 100-119 color change 2, 120-139 auto dimmer 7, 140-159 multicolor auto 1, 160-179 multicolor auto 2, 180-199 sound 1, 200-219 sound 2, 220-239 sound 3, 240-255 sound 4. (Channel 1-6 will not work in this mode. Channel 8 control the speed)
8	0-255	Control the speed

## ● SPECIFICATIONS

Rate Voltage: AC85-265V 50Hz-60Hz

Rate Power: 20W

Color: RGBW

Lamp: Super bright,  $\Phi$ 10, LED lamps

Quantity of Lamp: 186pcs (Red/Green/Blue 42pcs, White 60pcs)

N.W.: 1kg