



COLORDash™ *Batten*

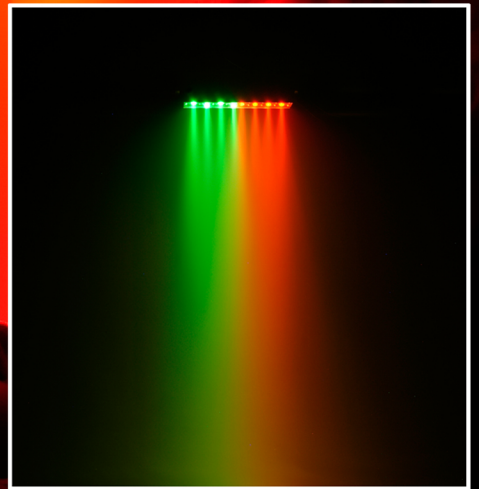

Brackets included for connecting multiple units.



CONTROL FEATURES

- 3, 4, 10, or 12-channel RGB LED linear wash light
- Operating modes
 - 3-channel: RGB control
 - 4-channel: RGB, dimmer
 - 10-channel: RGB, ID, dim, macro, strobe, auto / custom, module select
 - 12-channel: RGB of 4 separate sections
- RGB color mixing with or without DMX controller
- Built-in automated programs via master/slave, DMX or COLOR-CON
- Program and recall custom programs via master/slave, DMX or COLOR-CON
- Adjustable fan speeds

ADDITIONAL FEATURES

- High power, 1 W (350 mA) LEDs
- Additional threaded hole on rear for mounting (size M 10)
- Additional (IEC) power output: max 10 units @ 120 V (see manual for details)
- Attach multiple units together with the included bracket
- Includes 6.6 ft (2 m) power extension cable
- LCD display with password protection
- Transfer custom programs between fixtures
- Double-bracket yoke doubles as floor stand

SPECIFICATIONS

- Installed Optics: 30° Optional optics: 15°
- Beam angle: 29.5° Beam angle: 14°
- Field angle: 55.4° Field angle: 29°
- Lux: 357 @ 2 m Lux: 1,729 @ 2 m
- Light source: 24 x 1 W LEDs, 50,000hrs (8 x 350 mA red, 8 x 350 mA green, 8 x 350 mA blue)
- Power and current: 120 V, 60 Hz; 44.7 W, 0.7 A (operating), 0.3 A (inrush)
- Power and current: 230 V, 50 Hz; 42 W, 0.4 A (operating), 0.4 A (inrush)
- AC power: Auto-ranging 100 V ~ 240 V 50/60 Hz
- IEC power cable with plug: 60 in (1,524 mm)
- IEC power Linking cable: 82 in (2,083 mm)
- Weight: 7.9 lbs / 3.6 kg
- Size: 3.1 x 17.5 x 7.4 in / 80 x 444 x 188 mm

OPTIONS

- COLORado Controller (COLOR-CON)
- Optical systems: 15° (CL20X15)

www.chauvetlighting.com
 info@chauvetlighting.com
 t: 954.929.1115
 3000 North 29th Court
 Hollywood, FL 33020

CHAUVET[®]
 Value • Innovation • Performance