




**P3 P3D**  
**BLUETOOTH**  
**AUDIO RECEIVER**  
For Mixers and Active PA/DJ Systems

**OVERVIEW**

- XLR-output Bluetooth audio receiver for mixers and active PA speakers
- Connects smartphones & laptop to audio broadcast systems via Bluetooth to amplify music or other audio
- The P3 set includes one P3 Bluetooth audio receiver for mono audio
- The P3D set includes two P3 Bluetooth audio receivers for dual mono or stereo audio. Two P3 units can be linked in order to receive a stereo signal
- Internal rechargeable battery provides 6 hours of operation
- USB Type-C port for charging via any 5V USB power source
- Stable connectivity over a 100 ft range (line-of-sight without obstacles). Gives you ample coverage for parties, events and weddings

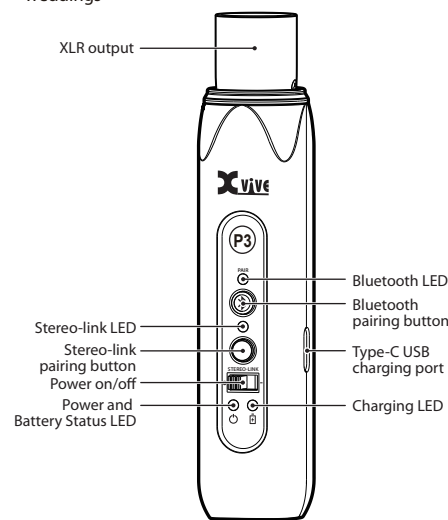

**LED ACTIVITY**


The **Charging LED** illuminates whenever P3 is connected to USB power. It's solid red when the unit is charging, and turns to solid green when the unit is fully charged.

The **Power and Battery Status LED** illuminates whenever P3 is powered on. When battery strength is above 31%, the LED will be solid red. When battery strength is less than 30%, it will flash every three seconds. When the battery strength is less than 5%, it will flash every 0.5 seconds, indicating that the unit needs to be recharged.

**PAIRING WITH P3**

1. Power on your P3 device.
2. The system will automatically search for Bluetooth sources when powered on; but you can press and hold the Pair button for 3 seconds to activate—the Bluetooth LED will flash when P3 is in pairing mode.
3. On your smartphone or tablet, turn on Bluetooth, find "P3" in the devices list, and connect to it.
4. When paired successfully, a confirmation tone will sound and the blue Bluetooth LED will illuminate.
5. Adjust the volume as desired on your smartphone/tablet and mixer.

**One P3 for Mono audio**

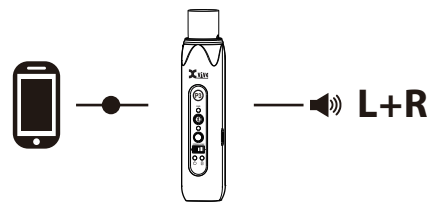

**STEREO-LINKING TWO P3 UNITS**

1. Follow steps 1-5 in "PAIRING WITH P3".
2. Press and hold the Stereo-Link button for 3 seconds on the primary (left channel) P3. Press and hold the Stereo-Link button for 3 seconds on the secondary (right channel) P3.
3. Both Stereo-Link LEDs will flash while the P3 units search for each other.
4. When they are successfully linked, each P3 will produce a confirmation tone and the Stereo-Link LEDs on both units will be on.


**NOTE:** Before pairing, ensure that there are no wifi devices (such as wireless routers) in the area.

**NOTE:** If the connection is not successful, please wait for the connection, or reset the P3 power and smartphone Bluetooth function before trying to connect again.

**NOTE:** When wirelessly connected to a single loudspeaker, the left and right audio signals will be summed to mono.

**NOTE:** When a battery is not available, the P3 can be powered by a regular 5V USB adapter.

**Stereo-Link Two P3s**

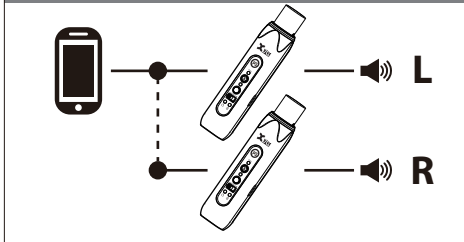

**SPECIFICATIONS**

**Dimensions:** 24 x 24 x 116.5 mm  
**Weight:** 0.12 lbs / 52g  
**XLR output:** XLR male, balanced  
**Output level:** +4 dBu  
**Bluetooth profiles:** 5.1, A2DP, AVRCP  
**Supported Bluetooth codecs:** SBC, AAC  
**Bluetooth range:** Up to 100 feet (30.5 m)  
**Frequency band:** 2402 to 2480 MHz  
**Battery life:** Up to 6 hours  
**Recharging time:** Up to 2 hours  
**USB charging:** Type-C 5V, 500 mA  
**A2DP frequency response:** 20 Hz - 20 kHz (ref 1 kHz, ± 3 dB)  
**DAC resolution:** 16-bit, 48 kHz  
**Rechargeable battery:** Built-in lithium-ion 300 mAh

**P3 TROUBLESHOOTING**

**BLUETOOTH LED/STEREO LINK LED IS FLASHING**  
• P3 is searching for a Bluetooth device; pair with a smartphone or computer following the "PAIRING WITH P3" instructions.  
• The device could be outside the working range of the Bluetooth connection. Bring the P3 and smartphone/laptop closer together; when within range, connection should happen automatically.


**BLUETOOTH LED/STEREO LINK LED IS OFF**  
• Pairing is unsuccessful. Check the directions in "PAIRING WITH P3" and make sure the devices are not too far apart. The connected devices must remain within working range during use in order for the connection to remain stable.

**SMARTPHONE/COMPUTER ALWAYS SEARCHING, CANNOT PAIR**  
• Wait for the Bluetooth connection to be made  
• Turn off the power and turn it on again

**VOLUME TOO LOW / NO SOUND**  
• Turn up the volume on your smartphone/pad/computer  
• Turn up the volume on the mixer or connected device

**WARNING TONE**  
• A tone will sound when Bluetooth is successfully connected or disconnected  
• When Bluetooth is searching there is no warning tone

**CANNOT CHARGE / NOT WORKING**  
• Check charger connections to the P3 and power source  
• Contact Xvive for warranty support

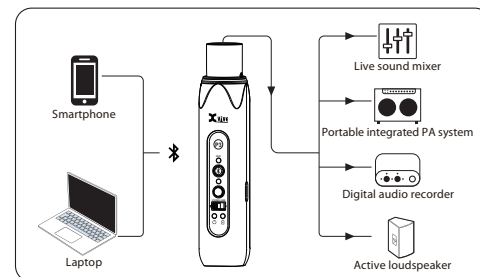

**IMPORTANT SAFETY INSTRUCTIONS:  
PLEASE READ THESE INSTRUCTIONS  
AND KEEP IN A SAFE PLACE**



**WARNING:**  
BEFORE USING YOUR PRODUCT,  
CAREFULLY READ THE OPERATING INSTRUCTIONS:

1. Observe all instructions in the manual carefully.
2. Do not to perform service operations beyond those described in the manual. Service is required when the apparatus has been damaged in any way, such as:
  - Liquid has been spilled or objects have fallen into the apparatus
  - The unit has been exposed to rain or moisture
  - The unit does not operate normally or changes in performance in a significant way
  - The unit is dropped or the enclosure is damaged
3. Do not place near heat sources, such as radiators, heat registers, or appliances which produce heat.
4. Guard against objects or liquids entering the device. Do not use or place unit near water.
5. Clean only with a dry cloth.
6. Only use attachments/accessories specified by the manufacturer.

**SAFETY INSTRUCTIONS FOR LITHIUM-ION RECHARGEABLE BATTERIES**

If abused or misused, the rechargeable batteries may leak. In extreme cases, they may even present a risk of explosion, fire, heat, smoke or gas. Xvive does not accept any liability for damage arising from abuse or misuse.

- Keep away from children.
- Only charge rechargeable batteries with chargers recommended by Xvive.
- Observe correct polarity.
- Pack/store charged rechargeable batteries so that the terminals cannot contact each other (danger of shorting out/fire hazard).
- Do not expose to moisture.
- Switch rechargeable battery-powered products off after use.
- Only charge rechargeable batteries at ambient temperatures between 10°C/50°F and 40°C/104°F.
- When not using rechargeable batteries for extended periods of time, charge them regularly (about every three months).
- Do not mutilate or dismantle.
- Do not heat above 60°C/140°F, e.g. do not expose to sunlight or throw into a fire.
- Immediately remove rechargeable batteries from obviously defective products.
- Do not continue to use defective rechargeable batteries.
- Only use rechargeable batteries specified by Xvive.
- Dispose of rechargeable batteries at special collection points or return them to your specialist dealer.
- Store the products in a cool and dry place at room temperature (approx. 20°C/68°F).
- Remove the rechargeable batteries if the products will not be used for extended periods of time.

**CAUTION:  
RISK OF ELECTRIC SHOCK—DO NOT OPEN**



**WARNING:**  
TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK,  
DO NOT REMOVE SCREWS.  
NO USER-SERVICEABLE PARTS INSIDE. REFER SERVICING TO  
QUALIFIED SERVICE PERSONNEL.

**WARNING:**  
TO REDUCE THE RISK OF FIRE OR ELECTRIC SHOCK, DO NOT  
EXPOSE THE APPLIANCE TO RAIN OR MOISTURE.



Hereby, **SHENZHEN FZONE TECHNOLOGY CO., LTD.**, declares that this type of equipment is in compliance with the essential requirements and other relevant provisions of Directive 2014/53/EU

**INFORMATION ABOUT COLLECTION AND DISPOSAL OF OLD ITEMS AND USED BATTERIES**

To protect our environment, please take old products and used batteries to proper collection places; and, in the EU, follow your national legislation and the Directives 2012/19/EU and 2006/66/EC.


When disposing of old products and batteries, please help to save valuable resources and prevent any possibilities of side effects on human health and the environment.

You can contact your local authority to find out how to dispose of old products and used batteries responsibly.

**For product owners in the European Union:**  
If you want to discard electrical and electronic items, please contact your dealer or supplier for further information.

**Information on Disposal in other Countries outside the European Union:**  
Please contact your local authorities or dealer for more information regarding the disposal of old items and used batteries.

The symbols shown below are valid only in the European Union. They indicate that you must not mix used electronic products and batteries with general household garbage.



**LEGAL DISCLAIMER**

XVIVE accepts no liability for any loss which may be suffered by any person who relies either wholly or in part upon any description, photograph, or statement contained herein. Technical specifications, appearances and other information are subject to change without notice.

**FCC CERTIFICATION**

THIS DEVICE COMPLIES WITH PART 15 OF THE FCC RULES. OPERATION IS SUBJECT TO THE FOLLOWING TWO CONDITIONS:  
(1) THIS DEVICE MAY NOT CAUSE HARMFUL INTERFERENCE, AND  
(2) THIS DEVICE MUST ACCEPT ANY INTERFERENCE RECEIVED, INCLUDING INTERFERENCE THAT MAY CAUSE UNDESIRE OPERATION.

**WARNING:**  
Changes or modifications not expressly approved in writing by XVIVE may void the user's authority to operate this equipment.

**RF EXPOSURE STATEMENT:**  
This transmitter must not be co-located or operated in conjunction with any other antenna or transmitter.

**NOTE:**  
This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. There is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:  
- Reorient or relocate the receiving antenna.  
- Increase the separation between the equipment and receiver.  
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.  
- Consult the dealer or an experienced radio/TV technician for help.

**This Class B digital apparatus complies with Canadian ICES-003.**  
IC Caution: RSS-Gen Issue 4 December 2014" & "CNR-Gen 4e Décembre 2014:  
This device complies with Industry Canada licence-exempt RSS standard(s).  
**Operation is subject to the following two conditions:**  
(1) This device may not cause interference, and  
(2) This device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Industrie Canada applicables aux appareils radio exempts de licence.  
**L'exploitation est autorisée aux deux conditions suivantes:**  
(1) l'appareil ne doit pas produire de brouillage, et  
(2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

**LIMITED WARRANTY**

For the applicable warranty terms and conditions and additional information regarding the XVIVE Limited Warranty, please email [support@xvive.com](mailto:support@xvive.com)

**FC** **CE** **RoHS** **UKCA** **R210-209111**  
**SHENZHEN FZONE TECHNOLOGY CO., LTD.**  
2nd floor, Building 12, Xicheng Industrial Area, Xixiang Town,  
Baoan District, Shenzhen Guangdong China. 518101  
[www.xvive.com](http://www.xvive.com)  
Made In China