

- SCREW-ON
- BOLT-ON

F110M-8


SPECIFICATION

Throat Size	1", 25.4mm
Nominal Impedance*	8Ω
Minimum Impedance	5.5 ohm @ 7.9 kHz
Power Rating**	25 W (AES)
Resonance	1.2kHz
Usable Frequency Range	2000Hz-20kHz
Recommended Crossover	2 kHz @ 12 dBkHz
Sensitivity***	108.4
Magnet Material	Ferrite
Magnet Weight	12oz, 0.34kg
Voice Coil Diameter	1" / 25.4mm
Voice Coil Former	Polyimide
Diaphragm Material	Mylar
DC Resistance (Re)	4.5Ω




MOUNTING INFORMATION

Overall Diameter	3.35", 85mm
Driver Volume Displaced	0.006 cu.ft., 0.18 liters
Depth	2.83", 72mm
Weight	1.71 lbs, 0.78 kg
Mounting Thread	1 3/8 in. 18 ext
Mounting Holes Diameter	N/A
Mounting Holes B.C.D.	N/A

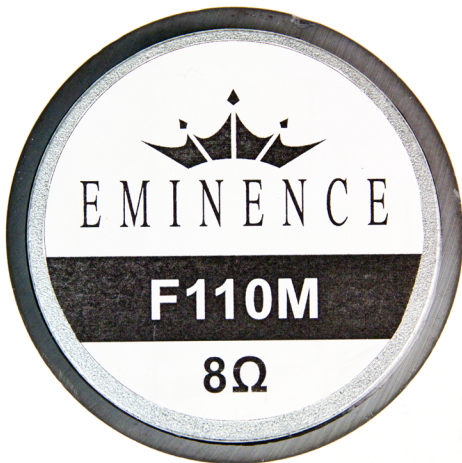

FREQUENCY RESPONSE & IMPEDANCE CURVE*

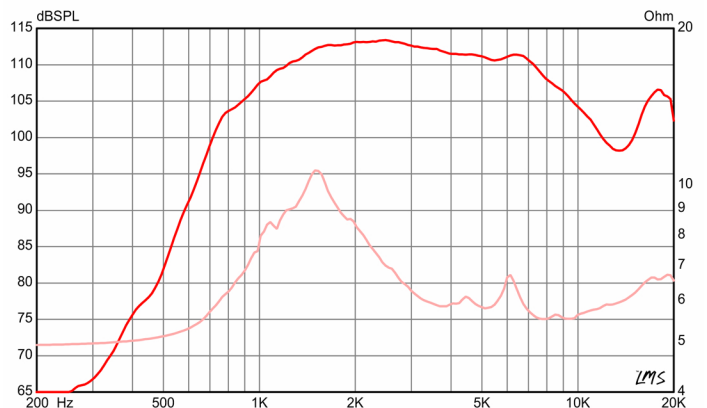

* See footnotes on the following page for information regarding usable frequency range, nominal impedance, power rating and sensitivity.