



©2023 Cherub Technology-All rights reserved. No part of this publication may be reproduced in any form without prior written permission of Cherub Technology.

www.nuxefx.com

Made in China

NUX




MIGHTY MKII

TS/AC HD
WHITE-BOX AMP
MODELING ALGORITHM

New Generation Amp

Owner's manual

**8 WATTS
6.5 FRFR
7 PRESETS
DRUM MACHINE**

CAUTION

Risk of explosion if the battery is replaced by an incorrect type.

WARNING

To reduce the risk of fire or electric shock, do not expose this appliance to rain or moisture.

CAUTION

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.



The lightning symbol within a triangle means, "Electrical caution!" It indicates the presence of information about operating voltage and potential risks of electrical shock.



The exclamation point within a triangle means, "Caution!" Please read the information next to all caution signs.

Introduction

Thank you for purchasing the NUX MIGHTY 8BT MKII. The brand new MIGHTY 8BT MKII includes a 6.5" FRFR speaker with IR technology, offering you limitless tonal possibilities. By using 8 x AA batteries, this portable amp will let you busk anywhere for up to 8 hours..


The MIGHTY 8BT MKII provides a variety of effects for electric guitar and bass guitar including amp modeling and cabinet IRs. It also comes with acoustic amp modeling and acoustic IRs to let you simulate acoustic guitar tones.

There's even an additional channel on the amp to plug in a dynamic mic, making it a great solution for live performances.

Editing and saving your presets can be done in the studio or on the go with the MightyAmp App for your smart device (iOS/Android) or Mighty Editor™ software (Mac/PC). And you can even load 3rd party IRs through the Mighty Editor™ edit software to expand your tone. (You can load any WAV format IRs, the Mighty Editor™ will convert to 32bits/48kHz onto the device automatically.)



Mighty Editor™

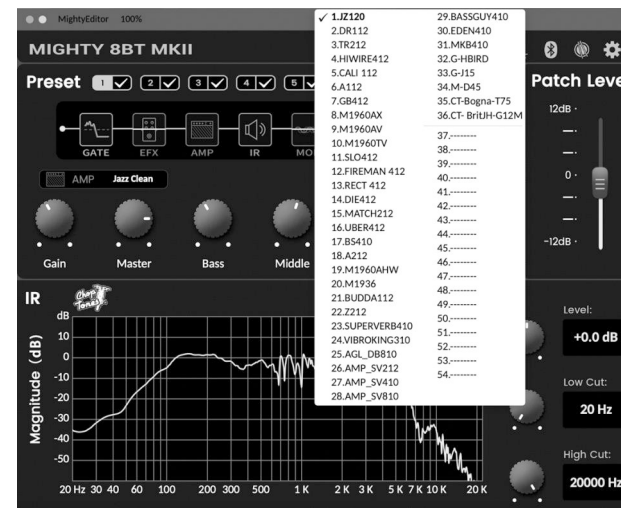

Note: There are 36 default IRs, and user IR slots are 18 (from 37 to 54).

MightyAmp



The MightyAmp™ APP and Mighty Editor™ edit software lets you tweak all the signal blocks and parameters. The MIGHTY 8BT MKII includes GATE, EFX, AMP, IR, MOD, DLY and RVB signal blocks.

The MIGHTY 8BT MKII supports USB-C audio stream, meaning that it can be an USB recording interface. It supports Normal / Dry Out / Re-amp / Loopback routing, which can be adjusted via the MightyAmp™ APP or Mighty Editor™ edit software even live stream jamming with Loopback! (Loopback signal includes PC's playback, Bluetooth audio, AUX IN signals.) Use the OTG adaptor, you can use the mobile phone to do livestreaming!

Note: Be sure to download the NUX ASIO Driver from the NUX website prior to using the MIGHTY 8BT MKII as a recording interface if you're on a PC. If you're a Mac user, it's plug and play.


For iOS devices, please use the original APPLE® Lightning to USB OTG adaptor.



**All of the brand and model names mentioned on this page are Trademarks of their respective owners, which are in no way associated or affiliated with NUX Effects and Cherub Technology CO. LTD.*

Operation

● Control Panel

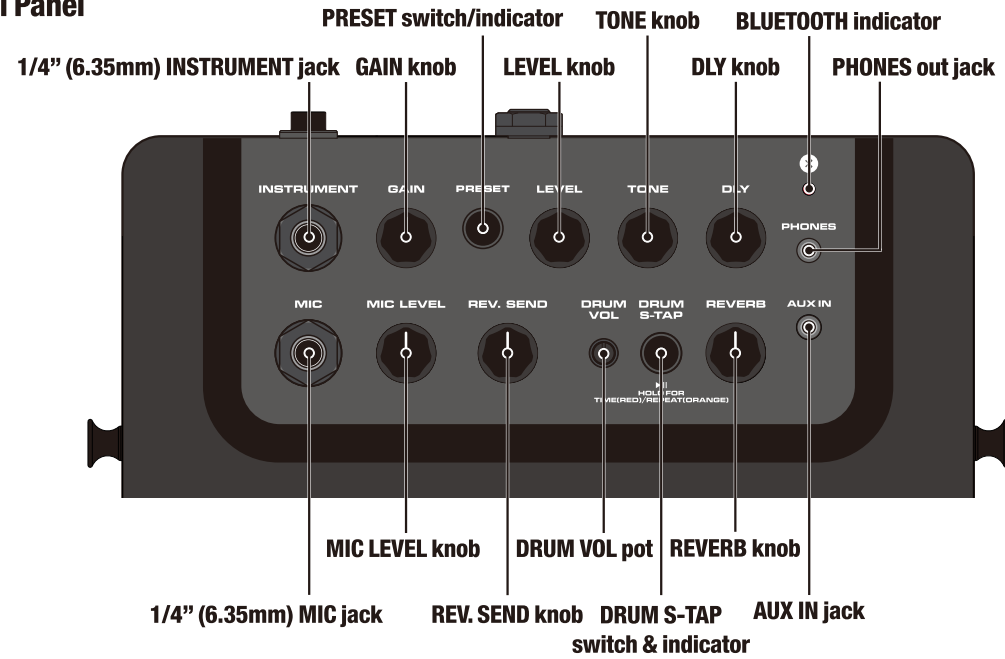


BLUETOOTH indicator



When connecting a Bluetooth enabled mobile device to the MIGHTY 8BT MKII's Bluetooth audio, the BLUETOOTH indicator will turn on "Blue". (If not connected, the BLUETOOTH indicator will flash "Blue".)

Operation: Do the following to play audio through the MIGHTY 8BT MKII via Bluetooth. Click "Settings" on your mobile device. Enter "Bluetooth", and choose "NUX NGA-8BT". Once connected to the MIGHTY 8BT MKII's Bluetooth audio, you will hear a connection sound.

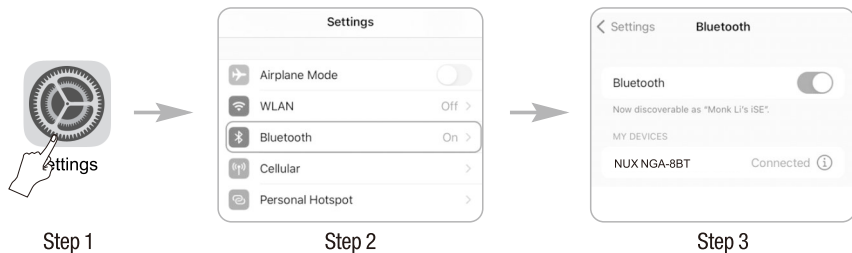

If you wish to disconnect the MIGHTY 8BT MKII, just press and hold the PRESET button/indicator to disconnect. Then you can connect to MIGHTY 8BT MKII manually.

Note: The Bluetooth audio and Bluetooth MIDI are independent, you have to connect them separately. Both of these connections must be made in order to use the MIGHTY 8BT MKII's full functionality. Keep reading to complete this process.

MightyAmp™ APP connects with the device.

Operation: Launch the MightyAmp™ APP on your mobile phone, and press "Settings" to choose "Current Amp" as "MIGHTY 8BT MKII", then "Click to Scan Devices". The APP will find "MIGHTY 8BT MKII". Now select it, and the APP will connect with the device.

Note: The APP uses Bluetooth MIDI to communicate with the device.

Note: For Android OS, you may need to turn on GPS permission. **PRIVACY NOTE:** We do not use your GPS to track you. Where you want to play music is your business, not ours!

Applications that scan for Bluetooth devices must request permission in the manifest file. This LOCATION permission is required because it may be possible to guess the location of an Android device by seeing which BTLE devices are nearby.

https://developer.android.com/reference/android/media/midi/package-summary#btle_location_permissions



1/4" (6.35mm) INSTRUMENT jack

INSTRUMENT



Connect your cable with instrument into INSTRUMENT jack. (You can use a guitar, a bass, an electric acoustic guitar, ...etc.)

GAIN knob LEVEL knob TONE knob PRESET switch/indicator

GAIN



GAIN knob
Controls AMP model's gain.

LEVEL



LEVEL knob
LEVEL knob controls AMP model's master volume.

TONE



TONE knob
TONE knob controls AMP model's Presence / Bright switch / Tone.

PRESET





PRESET switch/indicator

While the device is engaged, you can press the PRESET switch to change the preset from 1~7. The indicator will display colors related to specific presets.

Note: You can adjust which preset can be ACTIVE while you press the PRESET switch through MightyAmp™ APP or Mighty Editor™ edit software. (ACTIVE function)

MightyAmp™ APP example

Choose preset 1, 3, 5, 7 and press Active icon, then the device will know preset 1, 3, 5, 7 will be chosen while you press the PRESET switch.

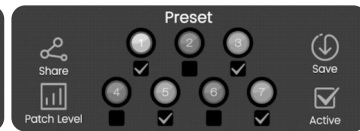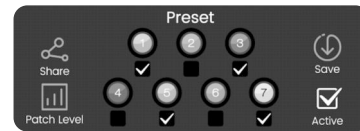

Mighty Editor™ example

Click icon, the 7 PRESETS will be COLORED, then choose the ones you want to active, like 1, 3, 5, 7. Then press icon again, Mighty Editor™ will show current preset, and according to the interface, you will see which is be chosen with .



1/4" (6.35mm) MIC jack MIC LEVEL knob REV. SEND knob

MIC



1/4" MIC jack
Connect with dynamic microphone.

MIC LEVEL



MIC LEVEL knob
Adjust the dynamic microphone input level.

REV. SEND



REV. SEND knob
Adjust the REVERB mix level related to RVB block.

REVERB knob

REVERB



Controls RVB block (REVERB) mix level.

DLY knob

DLY



Regularly controls Delay's mix level. Press DRUM S-TAP switch to change indicator's color can Alt tweak DLY knob as TIME(RED) or REPEAT(ORANGE).

DRUM VOL pot

DRUM
VOL



Controls the drum machine volume.

DRUM S-TAP switch & indicator

DRUM
S-TAP



▶||
HOLD FOR
TIME(RED)/REPEAT(ORANGE)

Press it to start / stop the drum machine. The Smart Tap Tempo adjusts the drum tempo. While the drum machine plays back, the indicator will flash "GREEN" in time with the drum BPM. To set a new tempo, simply tap this switch in succession to the desired tempo. This switch also includes a secondary function specific to the DLY block. Press and Hold the switch to change the indicator's color to RED, which enables you to access the DLY TIME parameter. Once accessed, just use the DLY knob to alter the value. Press and hold the switch

again to change the indicator's color to ORANGE, which enables you to access the REPEAT parameter. Just like before, use the DLY knob to alter this parameter.

*If you want to change the drum style, just use the MightyAmp™ APP or Mighty Editor™ edit software.

AUX IN jack

AUX IN



Connect a MP3 player into the 1/8" AUX IN jack to play audio tracks for jamming.


PHONES out jack

PHONES




Connect with headphones for silent practicing, the MIGHTY 8BT MKII speaker will be automatically muted.

● Back Panel

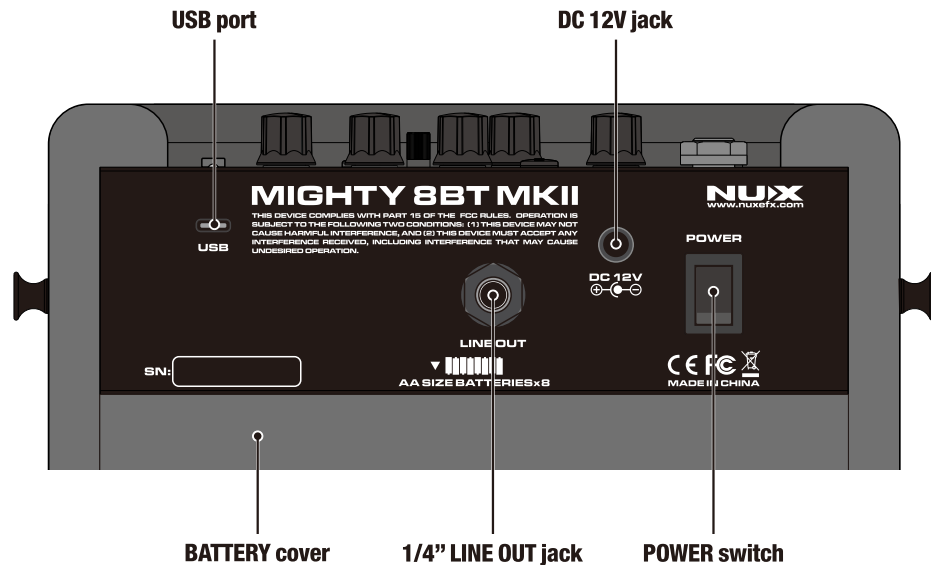

DC 12V jack POWER switch



Connect the included power adaptor and toggle the POWER switch to turn on the MIGHTY 8BT MKII.

USB port



This port is for the Mighty Editor™ edit software, USB audio stream, and Firmware updates. Please note that the USB port cannot be used to power the amp.

Recording

For WIN OS, please go to the product page to download ASIO driver for recording.
For MAC OS, the device supports CORE AUDIO, so there is no need for driver.

Firmware Update

Connect to your PC via USB, then press and hold the DRUM S-TAP switch and turn on the device by toggling POWER switch to enter to DFU (Device Firmware Update) mode. Then use the DFU updater software to update the firmware. (You can get the firmware and firmware update guide on the product page.)

1/4" LINE OUT jack



The 1/4" LINE OUT jack supports TRS balanced output signal.. This means that the amp signal (including all of the processing) and the mic signal can be connected to a PA system or mixer.

BATTERY cover

If you're on the go, you can also operate the device with 8 AA batteries. We recommend using alkaline batteries. Maximum operation time is approx.8 hours.

To insert or change batteries, please remove the battery compartment cover by pulling the ribbon gently as shown in Figure 1. Be sure to observe the correct polarity, otherwise the device will not work or could be damaged as shown in Figure 2.




Figure 1

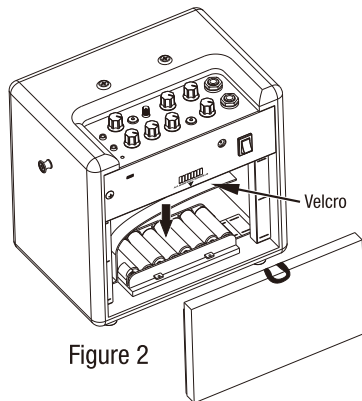


Figure 2

Be sure to check out the MIGHTY 8BT MKII tutorials on our NUX YouTube channel for more pro tips.

- 8 watts with 6.5" FRFR speaker portable Modeling Amplifier.
- MIC input.
- TSAC-HD (White-Box) Amp Modeling algorithm offers realistic playability & feedback.
- 512 samples IR resolution. (36 premium built-in IRs and 18 user slots for 3rd party)
- 7 presets with ACTIVE functions. (PRESET switch toggles ACTIVE ones sequentially)
- GATE, EFX, AMP, IR, MOD, DLY, RVB effect blocks.
- White-box algorithm EFX offers analog response and natural chaos.
- Patch Level function for each preset.
- Drum machine.
- Intuitive MightyAmp™ APP & Mighty Editor™ edit software(3rd party IR loader).
- USB-C: Mighty Editor™ edit software communication, USB audio stream, and Firmware update.
- 8 x AA batteries can drive 8 hrs.

Specifications

- INSTRUMENT Input Impedance: 1M Ω
- MIC Input Impedance: 6.2k Ω
- AUX In Impedance: 9.1k Ω
- Headphone Output: 280mW+280mW(To 33 ohms load)
- Sampling Rate: 48KHz / 32-bit
- System Latency: 1.42ms
- Current Draw: 12V DC 170mA
- Speaker: 6.5", 4 Ω , 10W
- Dimensions: 240mm (L) x 166mm (W) x 220mm (H)
- Weight: 2.96 kg

* Specification may change without notice.

Accessories

- Power adaptor
- Owner's manual
- Warranty card
- NUX sticker





请注意！重要安全说明。
在连接使用前，阅读以下说明。

警告：为减少火灾或触电的危险，请勿将本产品置于雨中或潮湿的地方。电池（电池包或组合电池）不得暴露在诸如日照、火烤或类似过热环境中。

注意：为避免火灾或触电等危险，请勿擅自拆卸本产品。维修本产品内部部件对于非专业人员来说较为困难，若有损坏请交给专业维修人员处理。

注意：本产品已经过测试，证明符合FCC规则第15部分的B级数字设备的限制规定。操作应符合以下两个条件：（1）本产品不会产生有害干扰。（2）本产品必须接受任何干扰，包括可能会导致非正常操作的干扰。

1. 仅能使用与出厂附带规格相同的电源适配器。如果您不确定可用的电源类型，请咨询您的经销商。
2. 本产品不应遭受水滴或水溅，产品上不应放置诸如花瓶一类的装满液体的物品。
3. 请勿放置在热源附近，如散热器、电热器，或其它产生高热量的设备。
4. 如果电池更换不当会有爆炸危险，只能用同样类型或等效类型的电池来更换。
5. 请勿尝试自行维修本产品。如需维修，请联系我司售后热线，或交给专业的维修人员。
6. 本产品遭遇电源线或插头损坏、不明物体进入、进水等情况，请谨慎使用，并主动联系售后维修。
7. 如果长时间不使用本产品，应拔掉电源线。
8. 避免踩踏电源线，避免过度绷紧电源线。
9. 人耳长时间接收高音量声音可能会导致无法挽回的听力损害，请始终保持“安全聆听”。



加贴该标识的设备仅按海拔2000m进行安全设计与评估，因此，仅适用于在海拔2000m以下安全使用，在海拔2000m以上使用时，可能有安全隐患。



加贴该标识的设备仅按非热带气候条件进行安全设计与评估，因此，仅适用于在非热带气候条件下安全使用，在热带气候条件下使用时，可能有安全隐患。

请遵守所有的指示和注意所有警告并保留这些说明！

产品简介

感谢您选择并购买NUX MIGHTY 8BT MKII便携式吉他/贝斯音箱，6.5英寸FRFR喇叭与IR技术的组合可以给您带来丰富的音色。使用8节AA电池，它可以让您在任何地方畅“弹”长达8小时。

MIGHTY 8BT MKII内置了一系列吉他和贝斯用效果，包括音箱模拟以及箱体IR。想要模拟木吉他音色？交给我们，MIGHTY 8BT MKII有木吉他音箱模拟以及木吉他IR；想要玩弹唱？交给我们，MIGHTY 8BT MKII有独立的麦克风通道。


MIGHTY 8BT MKII的音色编辑尤为便捷，您可以根据需要选用Mighty Amp™移动端应用（适配iOS及Android）或是Mighty Editor™桌面端编辑软件（适配Windows及Mac）。二者使用体验基本一致，Mighty Editor™还支持导入第三方IR文件（Mighty Editor™集成了格式转换功能，您导入的第三方IR文件会自动被转换成32bits/48kHz格式）。

***注意：**MIGHTY 8BT MKII内置了36个出厂IR，用户存储位置为18个（位置编号：37-54）。

*下载Mighty Amp可体验到更多功能及音色，APP可在App Store苹果应用商店和Google Play应用商店下载。



Mighty Editor™

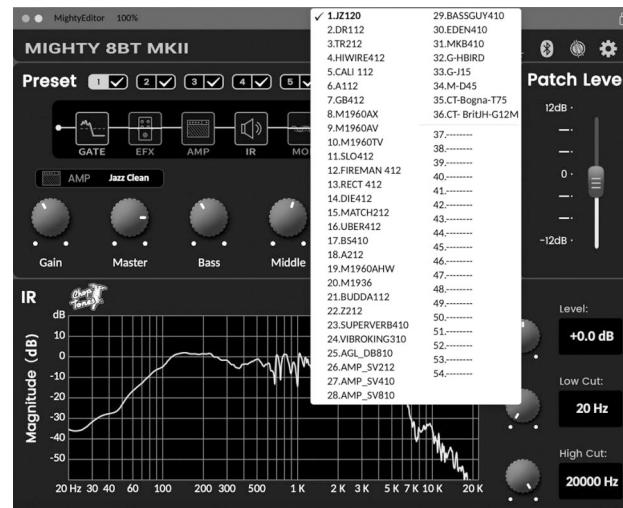

Mighty Amp



使用NUX MIGHTY 8BT MKII面板上的旋钮、按键可以快速切换预设、控制鼓机以及简单地调整音色。若要深入编辑音色，我们建议您使用Mighty Amp™移动端应用或Mighty Editor™桌面端编辑软件。不管是移动端应用还是桌面端软件，功能都非常强大，界面都非常直观，调整起来也都十分方便。


NUX MIGHTY 8BT MKII信号链包括7大效果模块 (GATE, EFX, AMP, IR, MOD, DLY以及RVB) , 使用Mighty Amp™移动端应用或Mighty Editor™桌面软件来调节各个模块下效果或音箱模型的参数。MIGHTY 8BT MKII背部的USB Type C接口支持音频串流, 这意味着您可以将其用作USB录音声卡, 支持Normal, Dry Out, Re-amp以及Loop Back四种模式。您可以根据实际需要, 使用Mighty Amp™或Mighty Editor™来选择合适的模式, 不再需要设置DAW的USB OUT。您还可以使用Loop Back模式来直播弹琴 (Loop back模式下, 输出信号包含电脑端的回放、蓝牙音频、AUX IN输入信号)。使用OTG转换器, 您甚至可以用手机进行直播! 苹果手机用户请务必选用原装APPLE® Lightning转USB OTG转换器。



***注意:** 如果您所使用的是Windows系统电脑, 请先从NUX网站下载NUX ASIO驱动程序。如果您是Mac用户, 则可略过此步骤。

***注意:** 本说明书中所提及的其他产品名称、注册商标和公司名词属于其各所有者, 与纽克斯或深圳市蔚科电子科技有限公司开发有限公司无任何关联或附属关系。提及仅用于功能或特性说明, 而非侵犯其各所有者的各项权利。

● 前面板

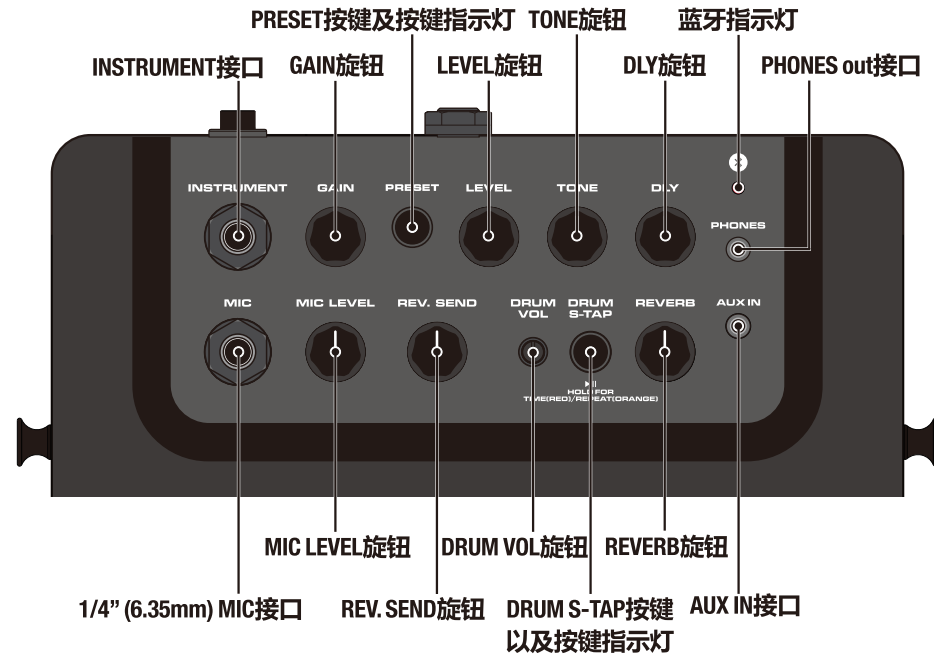


蓝牙指示灯



蓝牙音频状态指示灯。

蓝牙音频连接指南：

1. 确认MIGHTY 8BT MKII处于开机状态。
2. 进入手机或平板电脑的设置选项，找到蓝牙设置菜单。
3. 进入蓝牙设置菜单，在蓝牙设备标题下找到名称为“NUX NGA-8BT”的蓝牙设备，点击进行连接。

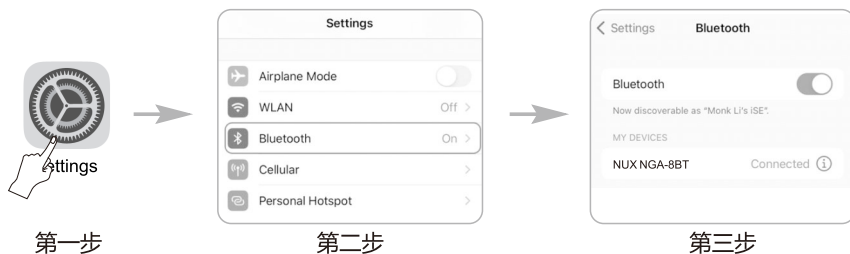

蓝牙音频连接成功后，会有提示音响起，同时蓝牙指示灯会保持蓝色常亮状态。当NUX MIGHTY 8BT MKII蓝牙音频处于断连（等待连接）状态时，蓝牙指示灯呈蓝色闪烁状态。如果您想要断开MIGHTY 8BT MKII与手机或平板电脑的蓝牙音频连接，您可以长按PRESET按键。

***注意：**蓝牙音频与蓝牙MIDI是相对独立的，初次使用时，您需要分别进行一次手动连接。蓝牙音频与蓝牙MIDI两个连接均建立后，您才能使用MIGHTY 8BT MKII完整的功能。

蓝牙MIDI(Mighty Amp™)连接指南：

1. 确认MIGHTY 8BT MKII处于开机状态并在手机或平板电脑上打开Mighty Amp™ App。
2. 点击下方标签栏上的Settings图标进入设置列表，点击Current Amp（当前音箱）进入设备选择页面，然后点选“MIGHTY 8BT MKII”选定设备。
3. 选定设备后，点击设置列表下方的“Click to scan device（点击后开始扫描设备）”，App开始自动扫描附近的蓝牙MIDI设备。
4. 当“MIGHTY 8BT MKII”出现在“Found Devices（已找到的设备）”标题下时，点击“MIGHTY 8BT MKII”进行连接。

蓝牙MIDI连接成功后，您可以使用Mighty Amp™ App来控制MIGHTY 8BT MKII。

***注意：** Mighty Amp™与MIGHTY 8BT MKII是通过蓝牙MIDI来完成各项指令的。

***注意：**多数安卓用户可能需要为Mighty Amp™开启位置权限，我们不会收集您的隐私。如果您想了解安卓系统为什么需要开启位置权限，请参考安卓官方的开发者文档：

https://developer.android.com/reference/android/media/midi/package-summary#btle_location_permissions



INSTRUMENT接口

INSTRUMENT



6.35mm单声道输入接口，请将您的电吉他、贝斯或是电箱琴通过连接线接入此接口。

GAIN旋钮 LEVEL旋钮 TONE旋钮 PRESET按键及按键指示灯

GAIN



GAIN旋钮

调节当前预设AMP模块下所选音箱模型的增益大小。

LEVEL



LEVEL旋钮

调节当前预设AMP模块下所选音箱模型的整体音量大小。

TONE



TONE旋钮

调节当前预设AMP模块下所选音箱模型的Presence、Bright、Tone。

PRESET



PRESET按键及按键指示灯


预设切换按键，MIGHTY 8BT MKII内置7个预设，短按PRESET按键可循环切换预设。切换预设后，PRESET按键指式灯的颜色也会随之变化。

提示：您可以使用Mighty Amp™或Mighty Editor™来选择用户自选预设。

用户自选预设：您可以勾选任意数量的预设，以便简化切换预设的流程。

例：吉他手大鹏日常练习需要使用四个预设，使用Mighty Editor™进行一番调整后大鹏在预设1、预设3、预设4以及预设7四个位置上编辑并保存了预设。此时，大鹏只需要取消勾选预设2、预设5以及预设6三个预设并保存设置。这之后，大鹏便可以使用PRESET按键在这四个预设之间进行切换。

Mighty Amp™示例

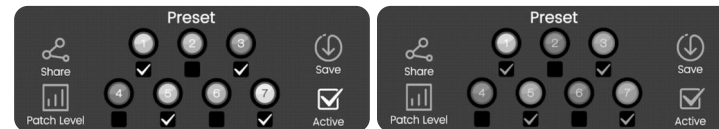

Mighty Editor™示例



1/4" (6.35mm) MIC接口 MIC LEVEL旋钮 REV.SEND旋钮



1/4" (6.35mm) MIC接口
6.35mm单声道输入接口，可连接动圈麦克风。



MIC LEVEL旋钮
调节麦克风输入信号的强度。



REV.SEND旋钮
调节混响效果的混合比（与RVB模块相关）。

REVERB旋钮

REVERB



用于调节混响效果混合比。

DLY旋钮

DLY



用于调节延迟效果的混合比。

DRUM VOL旋钮

DRUM
VOL



用于调节鼓机的音量。

DRUM S-TAP按键以及按键指示灯

DRUM
S-TAP



HOLD FOR
TIME (RED) / REPEAT (ORANGE)

按DRUM S-TAP按键一次来激活鼓机，有节奏的连续按压DRUM S-TAP按键可以打点设速设置鼓机的速度。鼓机工作时，再按一次DRUM S-TAP按键可以停止鼓机，转动DRUM VOL旋钮可以调节鼓机的音量大小。

DRUM S-TAP按键的第二功能还可以激活与DLY模块相关的参数控制，您可以长按DRUM S-TAP按键并依据其指示灯的状态来作出判断：TAP指示灯呈绿色时，您可以使用DLY旋钮来调整DLY模块当前所选效果模型的延迟时间；TAP指示灯呈现橙色时，您可以使用DLY旋钮来调整DLY模块当前所选效果模型的延迟重复（DELAY REPEAT）。

*如果您想要调整鼓机类型，请使用Mighty Amp™ 或Mighty Editor™。

AUX IN接口

AUX IN



3.5mm音频输入接口。可外接音频播放装置播放伴奏。


PHONES out 接口

PHONES



3.5mm音频输出接口。可连耳机进行静音练习。

●背面板

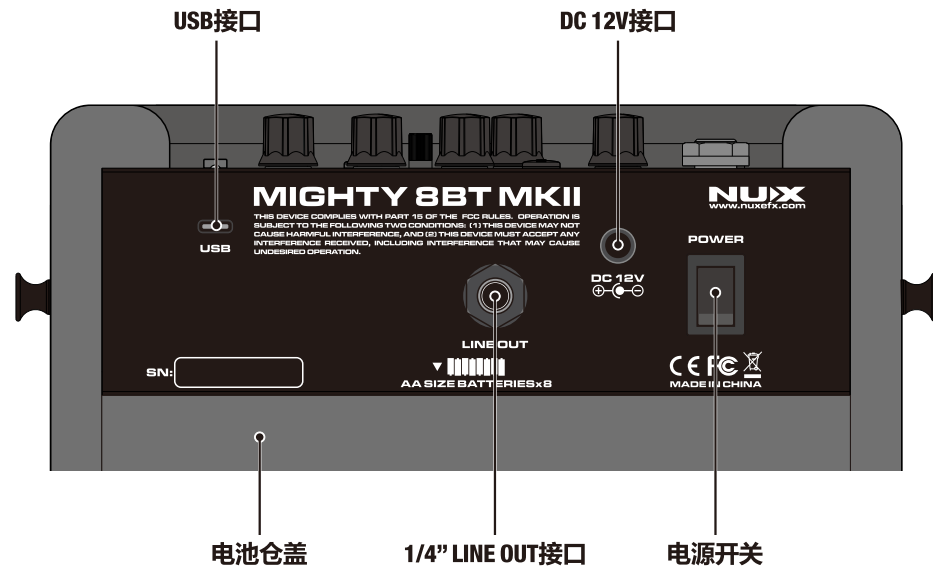

DC 12V接口 电源开关



将附赠的电源适配器通过此接口连接至MIGHTY 8BT MKII为音箱供电，拨动电源开关开启或关闭MIGHTY 8BT MKII。

USB接口



USB Type-C数据接口，可连接电脑进行固件更新、使用Mighty Editor™编辑音色或录音。

固件更新需要使用高品质数据线并按照产品页面固件更新指南所述步骤进行操作。

将MIGHTY 8BT MKII用作USB声卡时，Windows用户需要提前安装NUX ASIO驱动；MacOs原生支持Core Audio即插即用。

1/4" LINE OUT接口



6.35mm TRS平衡信号输出接口。输出经过处理的吉他信号以及麦克风信号，可直接连接PA或调音台。

电池仓盖

MIGHTY 8BT MKII可以使用8节AA电池供电，建议使用碱性电池，使用电池供电时MIGHTY 8BT MKII可以连续工作约8小时（视具体电池和输出功率而定）。

MIGHTY 8BT MKII安装电池时，先取下箱体后电池仓盖（如图1所示），然后拉开固定电池的魔术贴，将AA电池按照电池仓所标示的极性方向放入（如图2所示），固定好魔术贴，盖上电池仓盖。

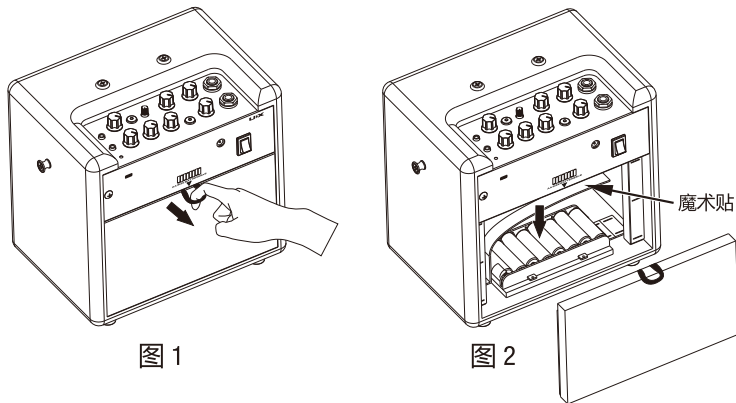


图 1

图 2

注：当音量变低或音色改变时，说明电池电量变低，请及时更换电池。

- 8瓦带3.6英寸FRFR喇叭的便携式音箱。
- 吉他 + 麦克风双通道。
- TSAC-HD白盒建模音箱模拟算法，提供真实的演奏手感和反馈。
- 支持512点IR，36个出厂IR，18个用户IR存储位置。
- 7个预设带用户自选预设功能。
- 7大效果模块。
- Patch level调节。
- 内置鼓机。
- 易于上手的移动端和桌面端音色编辑软件。
- 支持电池供电以及电源适配器供电。

技术规格

- INSTRUMENT接口输入阻抗：1MΩ
- MIC接口输入阻抗：6.2kΩ
- AUX IN接口输入阻抗：9.1kΩ
- PHONES OUT接口输出阻抗：280mW+280mW(To 33 ohms load)
- 采样率：48KHz / 32-bit
- 系统延迟：1.42ms
- 电流消耗：12V DC 170mA
- 喇叭：6.5”，4Ω，10W
- 体积：240mm(L) x 166mm(W) x 220mm(H)
- 重量：2.96 kg

*技术规格如有变更，恕不另行通知。

随机附件

- 电源适配器
- 使用手册
- 保修卡
- NUX贴纸

有关产品中所含有害物质的说明

为了控制和减少电器电子产品废弃后对环境造成的污染，本资料就本公司产品中所含的特定有害物质及其安全性予以说明。
本资料适用于2016年7月1号以后本公司所制造的产品。

环保使用期限



此标志适用于在中国国内销售的电子信息产品，表示环保使用期限的年数。所谓环保使用期限是指在制造日起的规定期限内，产品中所含的有害物质不致引起环境污染，不会对人体、财产造成严重的不良影响。环保使用期限仅在遵照产品使用说明，正确使用产品的条件下才有效。不当的使用，将会导致有害物质泄漏的危险。

产品中有害物质的名称及含量

部件名称		有害物质					
		铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr(VI))	多溴联苯(PBB)	多溴二苯醚 (PBDE)
主体	塑胶件	○	○	○	○	○	○
	五金件	×	○	○	○	○	○
	硅胶件	○	○	○	○	○	○
	内置电路板	×	○	○	○	○	○
附件	*交流电源适配器、线缆	×	○	○	○	○	○

*表示某些产品可能不含有这些项目，上表当中的信息仅在产品含有这些项目时适用。

本表格依据SJ/T 11364的规定编制。

○: 表示该有害物质在该部件所有均质材料中的含量均在GB/T 26572规定的限量要求以下。

×: 表示该有害物质至少在该部件的某一均质材料中的含量超出GB/T 26572规定的限量要求，因根据现有的技术水平，还没有什么物质能够代替它。

保护环境

如果需要废弃本产品，请遵循本地相关指引，请勿随意丢弃或作为生活垃圾处理，以避免对环境造成污染。

质量承诺

亲爱的 **NUX** 用户：

在您使用 **NUX** 产品时，请仔细参阅产品说明书，当您有疑问和困难时请拨打售后服务热线：
400-990-9866

- 一周内出现质量问题可退货退款
- 一年内出现质量问题可免费维修
- 一月内出现质量问题可调换
- 终身享有咨询和维修服务

[请向销售商索取正规发票并予以保存]

换修政策

一、包换政策：

- 1、消费者通过正规授权渠道购买的产品，自购机之日起1个月之内，在正常使用情况下出现非人为的产品性能故障、且产品外观及包装保持完好，可向所购机的经销商换机。
- 2、消费者在换机时应出示由经销商开出的购机凭证，否则经销商可以不予更换。

二、保修政策：

- 1、消费者通过正规授权渠道购买的产品(以发票所示销售方为准)，自购买之日起1年内，若出现非人为损坏的性能故障，可享受免费维修服务。
- 2、对于超过1年或人为及不可抗力因素造成损坏的产品，我司可提供有偿维修服务。

*本售后政策仅适用于中国大陆地区，其它国家及地区以当地售后政策及法律法规为准。

合格证

Certificate

检验员
Inspector

名称
Name 便携式吉他/贝斯音箱

型号
Type **MIGHTY 8BT MKII**

生产日期
Date

本产品经检验合格
This product is inspected and approved.

执行标准: Q/WKDZ 002-2020
Product is certificated with Q/WKDZ 002-2020

制造商

深圳市蔚科电子科技有限公司

制造商地址

深圳市南山区蛇口兴华路6号南海意库1号楼507

电话: 0755 - 2686 9866

网址: cn.nuxefx.com

生产商

珠海市蔚科科技开发有限公司

生产商地址

珠海市高新区唐家湾镇科技九路10号

电话: 0756-3689866

售后服务地址

广东省珠海市高新区唐家湾镇科技九路10号

珠海市蔚科科技开发有限公司 售后服务部

邮编: 519085