

# ART 415-A

## TWO-WAY SYSTEM



## DESCRIPTION

RCF ART 415-A is an active, wide dispersion 2 way sound reinforcement speaker. It integrates a high power 400 watt digital amplifier, a complete electronic processor section and RCF low distortion, high power neodymium transducers. The system is unique in its class for output and vocal intelligibility. All the transducers used for the ART 4 Series feature light weight neodymium magnets to guarantee better performances and make for easier transportation. A new 15" neodymium woofer design with 2.5" voice coil has been specifically developed for the ART 415-A. Combined with the perfect reflex port design of the speaker, the new woofer delivers an extremely accurate reproduction of the mid-bass frequencies and a punchy bass. The 1" compression driver uses a new 1.4" voice coil dome design and optimised geometry radial phase plug. This innovative design is powered from a high flux neodymium magnet offering a very open and natural midrange sound with extreme precision in high frequency reproduction.

RCF ART 415-A is equipped with a new generation of 400 Watt Digital Amplifier. The result of this is very high output, extremely low distortion and an incredible natural sound. Each amplifier presents both XLR In/Out connectors and a Jack input for the maximum connection versatility. An easy to reach volume knob on the back allows to set the overall volume of the speaker according to its application. A switchable EQ Mode makes it easier to select among two different equalisation presets: Extended response switch, which slightly emphasizes the bass response for playback music and low volume applications or Linear response switch, for using the speaker to amplify a live mix. 3 status LEDs – Power / Signal / Status are provided for monitoring the system.

An integrated DSP manages crossover, Eq., soft limiter, compressor and dynamic bass boost.

ART 4 cabinets are moulded on a special polypropylene composite material and are designed to dampen down vibrations even at maximum volume settings. The cabinet shape allows every ART 4 speaker to be used also in stage monitor configuration. At the bottom of the speakers a rugged stainless steel pole mount has been provided for deploying the speakers on stands or on subwoofers.

The woofer is protected from a strong, powder coated, metal grille. The cabinet features 2 M10 threaded fly points and an ergonomic top handle for easy transportation.

## MAIN APPLICATIONS







- Nearfield & portable PA
- Foreground/background PA, distributed PA, frontfill and sidefill
- Houses of worship, theatres, corporate AV, retail, theme parks
- Compact live sound reinforcement system
- Stage monitoring

## MAIN FEATURES

- 400 Watt digital bi-amplification, 300 Watt Low Frequency and 100 Watt High Frequency Power
- 128 dB max spl
- Wide dispersion 90 x 60 constant directivity horn
- 15" High power neodymium woofer, 2.5" voice coil
- 1" neodymium high frequency driver, 1.4" voice coil
- Electronic equalization, soft limiter and protection
- Xlr/jack combo input, xlr signal output
- 2 side handles and 1 ergonomic top handle for easy transportation and positioning









# ART 415-A

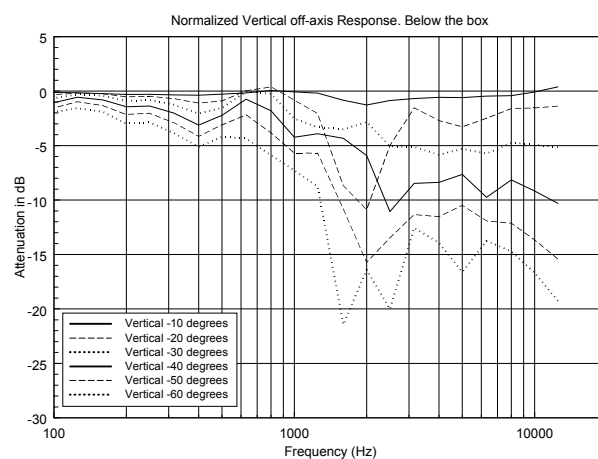
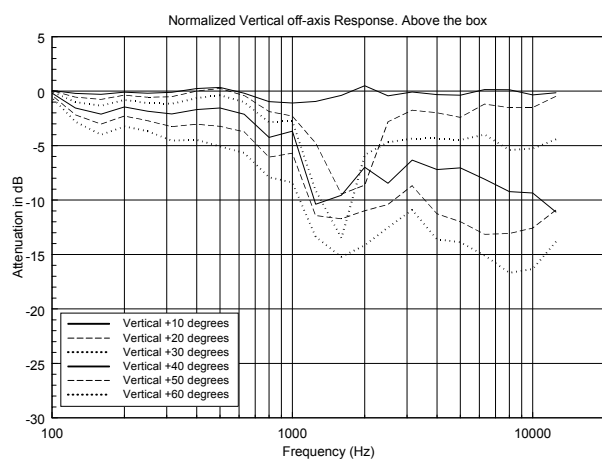
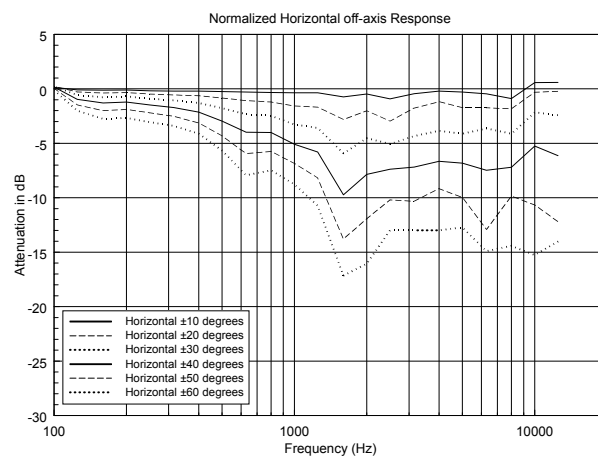
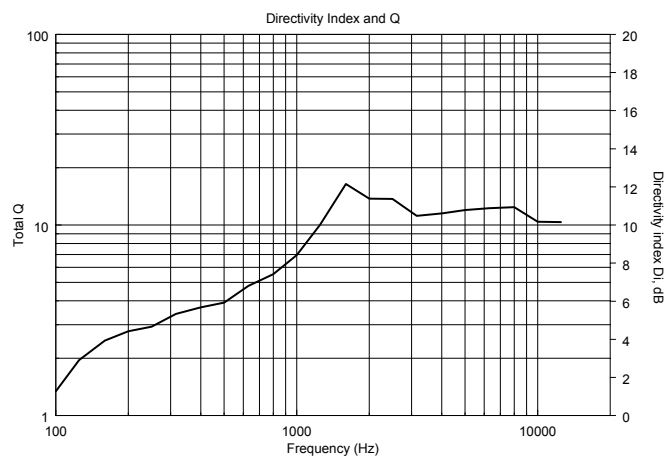
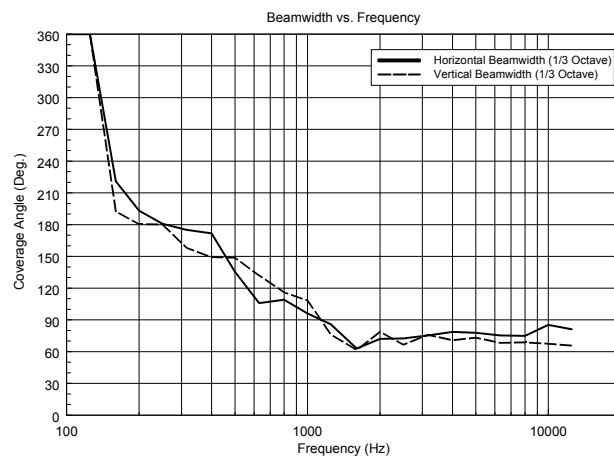
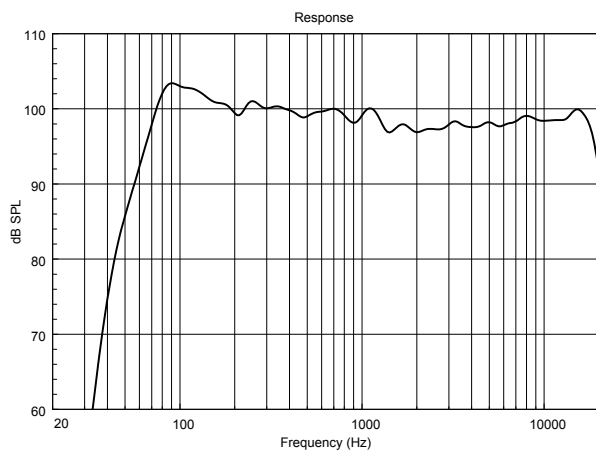


# ART 415-A

## HORIZONTAL 1/3 POLAR PLOT

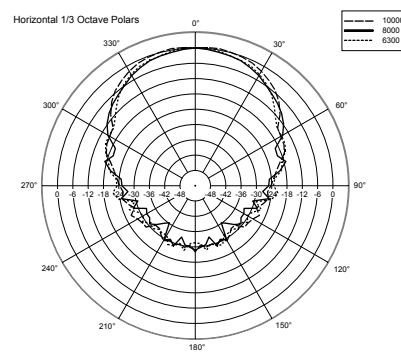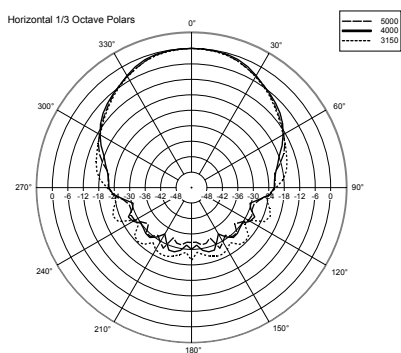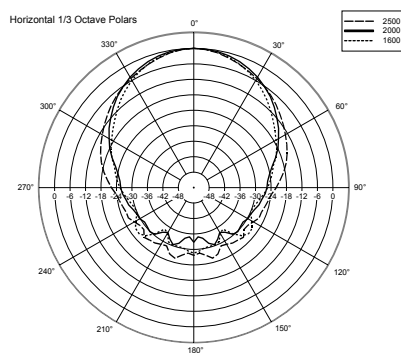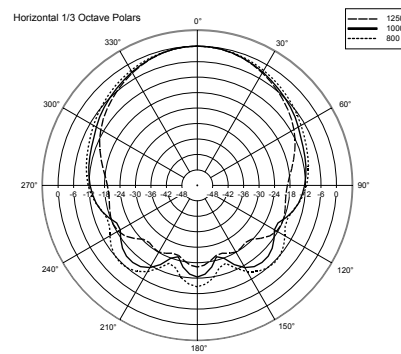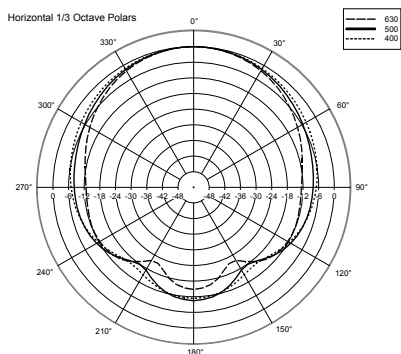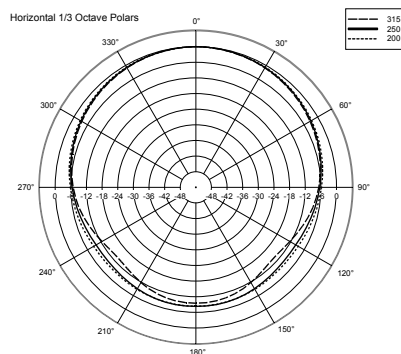

## VERTICAL 1/3 POLAR PLOT

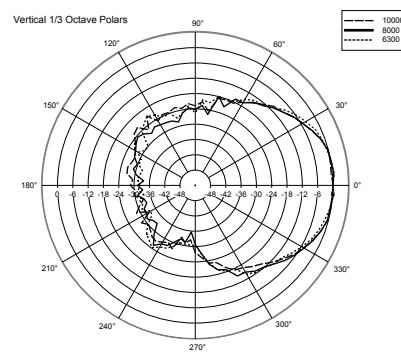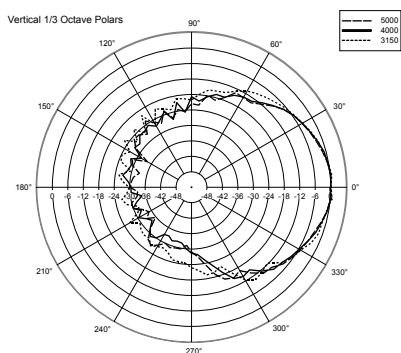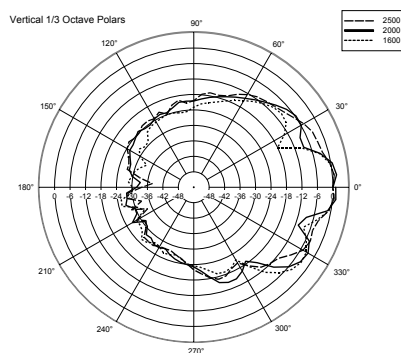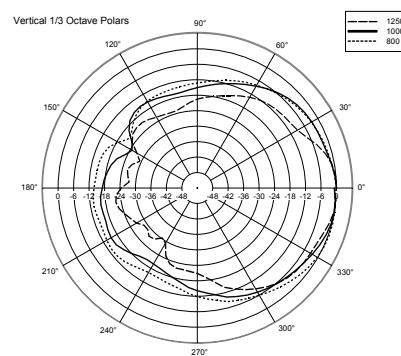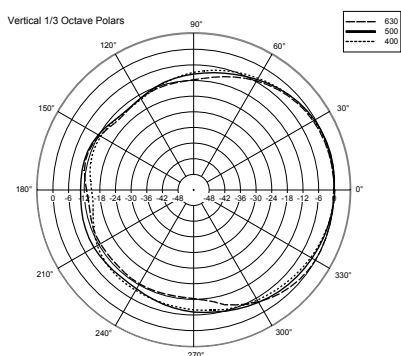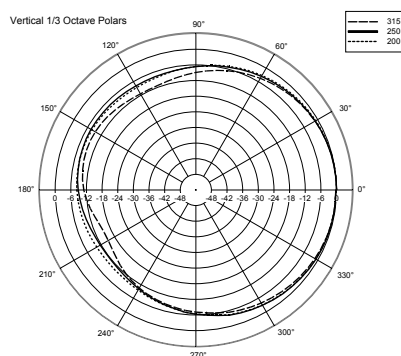


# ART 415-A

## PART NUMBERS

13000213 - 230VOLT

13000214 - 115 VOLT

## DIMENSIONS (All data are in mm)

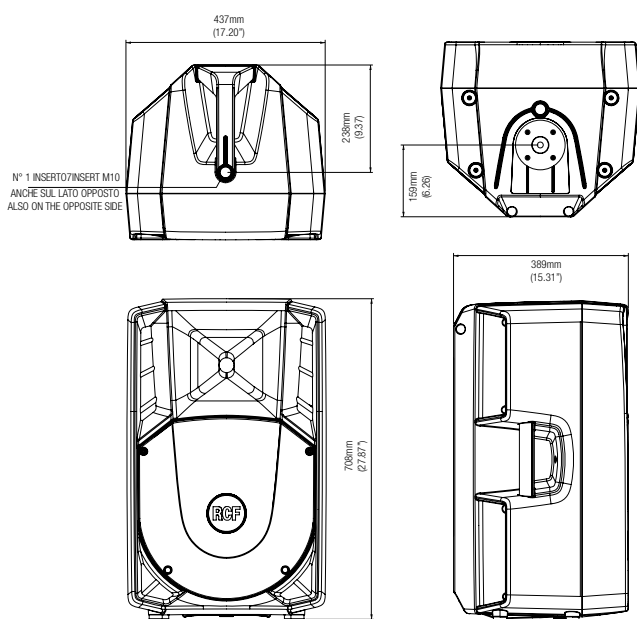

## ACOUSTICAL SPECIFICATIONS

Frequency response:	50 Hz- 20 KHz
Max SPL:	128 dB
Horizontal coverage angle:	90°
Vertical coverage angle:	60°
Compression driver:	1" neo, 1.4" voice coil
Midrange:	-
Woofer:	15" neo, 2.5" voice coil

## INPUT SECTION

Input signal (Impedance):	bal/unbal
Input/Output connector:	xlr-jack
Input sensitivity:	+4 dBu

## PROCESSOR SECTION

Crossover frequencies:	1800 Hz
Protections:	Themel, HF
Sensitivity control:	yes
Limiter:	soft limiter
High pass:	-
Controls:	flat/boost

## ACCESSORIES

AC S260	Steel speaker floor stand with folding base and telescopic rod, tube diameter 35mm. Load capacity up to 60kg, Weight 7.8 Kg, H MIN/MAX 170cm/240cm. Length once folded 123cm
AC S140	Aluminium speaker floor stand with folding base and telescopic rod, tube diameter 35mm. Load capacity up to 40kg, Weight 2.7 Kg, H MIN/MAX 140cm/214cm. Length once folded 107cm
AC PRO-FS	Steel speaker floor stand with folding base and telescopic rod, tube diameter 35mm. Load capacity up to 50kg, Weight 4.5 Kg, H MIN/MAX 137cm/210cm. Length once folded 102cm
AC PRO-LF	Steel professional adapter sleeve for speaker floor stand, tube diameter 35 mm. Load capacity up to 50Kg, Weight 0.7 Kg, H 27.5 cm
AC PRO-PM	Steel pole mount accessory for a satellite speaker on a subwoofer, tube diameter 35 mm. Load capacity up to 35Kg, Weight 2.4 Kg, H MIN/MAX 95cm/137cm
AC EB4X	Kit including No. 4 shouldered 10mm eye bolts
AC PMA	Speaker pole mount
AC ART715 H-BR	Horizontal bracket for ART 415-A, ART 425, ART 715-A and ART 725-A
Cover ART 725	Art cover for ART 415-A, ART 425, ART 715-A and ART 725-A

## AMPLIFIER

Power supply:	switching 400 Watt
High frequencies:	D / 100 Watt
Mid frequencies:	-
Low frequencies:	D / 300 Watt
Cooling:	convection
Connection:	Xlr/jack input, xlr signal output

## PHYSICAL

Height:	708 mm (27.87")
Width:	437 mm (17.20")
Depth:	389 mm (15.31")
Weight:	17.8 kg (39.24 lbs)
Cabinet:	Composite PP
Hardware:	pole mount
Handles:	1 top, 2 side
Pole mount cap	yes
Colour:	Black

